

MOULDBOARD PLOUGH


FEATURES

The Mounted Mouldboard Plough can handle the toughest ploughing job with outstanding penetration performance. The under frame and unit-to-unit clearance are adequate to cope with trashy conditions. Perfect alignment of the plough beams carrying the Mouldboard bottom is maintained by virtue of the frame construction. The Mouldboard will retain its mirror finish at all times, contributing to well-turned furrows. The plough has special wear resistant steel bottoms with bar points. Bar point bottom ensures longer life as it can be extended or reversed and re-used.



New!!! Also available with Shear Bolt Protection for rocky soil.

Shear bolt is designed to give way when implement encounters a rock while ploughing. Instead of damaging the entire implement, the shear bolt breaks and can easily be replaced.

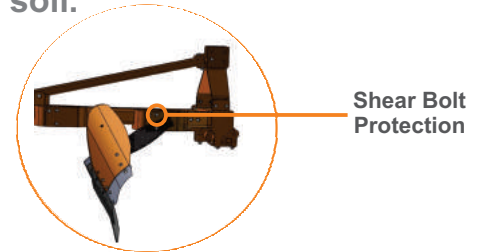

SPECIFICATIONS

MODEL	FMP2 / FMP2SB		FMP3 / FMP3SB		FMP4 / FMP4SB	
No of Furrows	2		3		4	
Frame (mm)	80x80	118x118	80x80	118x118	80x80	118x118
Mouldboard (mm)	8		8		8	
Blade (mm)	10		10		10	
Bar Point (mm)			40x25 Forged 100x15 Forged			
Width of Cut (mm)	610	710	910	1010	1210	1310
Depth of Cut (mm)	350	280	350	280	350	280
Safety Feature	Shear Bolt		Shear Bolt		Shear Bolt	
Length (mm)	1300		1880		2460	
Height (mm)			1066			
Weight (km)	235	350	350	420	455	530
Tractor Power (hp)	45-60	50-70	65-75	70-90	80-95	90-110
(kw)	33-44	37-52	48-55	52-67	59-70	67-82