


HP/kW | MF4708

82/61



	MF 4708
4 Wheel Drive	
A – Wheelbase - mm	2358
B – Overall length from front weight frame to rear linkage arms - mm	4562
C – Height to top of canopy	2594
D – Track width - mm	1565 to 1925

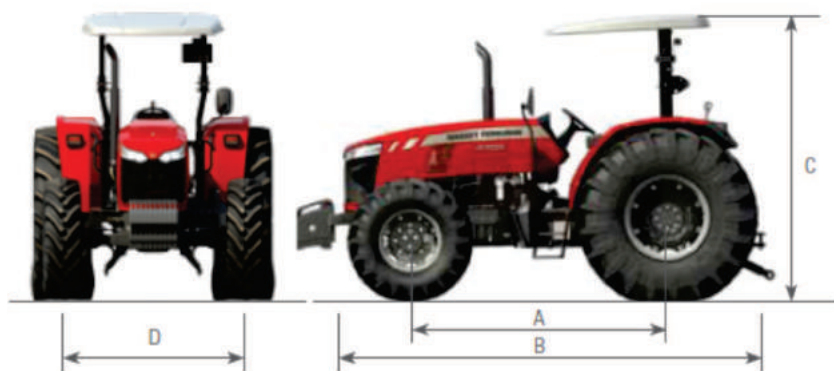

MASSEY FERGUSON
A world of experience. Working with you.

SPECIFICATIONS

Engine Performance		MF 4708 Essential
Engine hp (kW) power		★ ISO hp (kW) 82 (61)
Max torque @ 1500rpm		342
Rated engine speed		2200
Engine		
Engine type/no. of Cylinders/Capacity/Aspiration		AGCO Power AP44/4/4400cc/Turbocharged
Transmission		
Side Shift		12 x 12 Wet Clutch
Power Take-of		
IPTO single speed - 540 rpm		•
Steering		
Hydrostatic		•
Hydraulics		
3-point linkage control		Lever operated ELC
Lift capacity	max kg	3000
Oil flow	litres/min	65
System pressurebar		200
Spool valves		1 valve
Brakes		
Type		Oil immersed
Standard wheels and tyres		
Front 2wd/4wd		7.50-16 / 340/85 R24
Rear		460/85 R30
Weights and Dimensions		
Weight without ballast - Footstep	kg - 4WD	3430
Length	mm	4562
Height with ROPS / Canopy	mm - 4WD	2594
Wheel base	mm	2358
Capacities		
Fuel tank	litres	82

For even greater productivity a range of optional equipment is available including front weights, rear-wheel weights, two-post folding ROPS frame. For full details please consult your local Massey Ferguson dealer.



MASSEY FERGUSON



MASSEY FERGUSON is a worldwide brand of AGCO.
© AGCO Limited. 2010 | A-B-English/15078/1010