

TT4 RANGE

TT4.80 | TT4.90





New TT4, the tractor for you.

New Holland designed and developed the all new TT4 around you, effortlessly combining muscled up performance with new appealing features, giving you, the farmer, the cutting edge in tractor technology. Characterized by sturdy design and functional layout, the new TT4 thrives on being pushed to the limit. The TT4 range are simple to operate, easy to maintain and built to go the distance, offering maximum uptime and reduced maintenance cost, putting money back in your pocket.



TT4. Built with versatility in mind.

No two farms are alike, and that is why the TT4 has been engineered to offer farmers ultimate versatility and comfort. Featuring 2.5 tons maximum lift capacity, up to 54Lpm hydraulic flow, 10 new transmission options and a true flat deck operating platform with steering column mounted shuttling, the new TT4 offers bigger attitude to pack more into every working day.

Model	Rated hp(CV)	Wheelbase mm	Weight kg
T4.80	80	2258	2825
T4.90	88	2258	2825



TT4 range: 2 models and plenty of power for any operation


The TT4 truly is a modern take on a traditional favourite. The two model series have been designed to ensure the perfect spread of power across the range and includes a range-topping 88hp(CV) variant that offers reliable power that simply gets the job done. This tractor series is bursting with advanced modern features. Want more? How about head turning, distinctive New Holland design cues that not only look good but enhance productivity. TT4 tractors, beauty and functionality.

SPECIFICATIONS

Models

	TT4.80	TT4.90
Engine*		
No. cylinders / aspiration / valves / emission level Tier-Stage	4 / TCA / 2 / 3-3A	4 / TCA / 2 / 3-3A
Capacity (Litres)	3.9	3.9
Rated power ISO TR14396-ECE R120 @ 2300rpm [kW/hp[CV]]	59.7/80	65.7/88
PTO power at rated speed [kW/hp[CV]]	50.7/68	55.2/74
Max. torque @ 1400rpm (Nm)	310	340
Torque rise (%)	25	25
Fuel capacity Standard / optional Auxiliary (Litres)	90	90
Transmission		
Synchro - Mechanical forward / Reverse shuttle	●	●
8x8 Mechanical Synchro Shuttle transmission	○	○
12x12 Mechanical Synchro Shuttle transmission (dash mounted)	●	●
Splitter Synchro Shuttle transmission 16x16 & 24x24	○	○
Minimum speed / Maximum road speed (kph)**	1.72 / 35.87	1.72 / 35.87
20x20 Mechanical Synchro Shuttle transmission with creeper	○	○
Creeper - Minimum speed (kph)**	0.30	0.30
Front Axles		
4WD front axle	●	●
2WD front axle	○	○
Steering angle 4WD / Min. turn radius less brakes 4WD (°) / (m)	55 / 6.5	55 / 6.5
Rear axles		
Planetary reduction final drive	●	●
Differential lock (mechanically engaged)	●	●
Oil immersed multidisc braking system	●	●
Hydraulics		
Main pump flow / pump pressure (Lpm / Bar)	45 / 207	45 / 207
Optional pump flow / pump pressure (Lpm / Bar)	54 / 207	54 / 207
Independent steering pump flow (Lpm / Bar)	28.8 / 210	28.8 / 210
Rear auxiliary remote valves (Std / Max. number)	1 / 3	1 / 3
Linkage		
Category	I / II	I / II
Lift capacity @ ball ends (Std / Opt) (kg)	2000 / 2500	2000 / 2500
Lift capacity @ 610mm behind ball ends (Std / Opt) (kg)	1650 / 2050	1650 / 2050
PTO		
Independent rear PTO	●	●
Rear PTO (Std)	540	540
Rear PTO (Opt)	540E	540E
Rear PTO engine speed at 540rpm (rpm)	2198	2198
Rear PTO engine speed at 540Erpm (rpm)	1715	1715
Operator environment		
Mechanical suspension seat with seat belt on inclined plane	●	●
Flat deck operator area	●	●
Suspended brake and clutch pedals	●	●
Canopy	○	○
Two post foldable ROPS platform	○	○
Weights		
Shipping weight ROPS 2WD / 4WD (kg)	2825 / 3085	2825 / 3085
Maximum ballasted weight 2WD / 4WD (kg)	3630 / 3720	3630 / 3720
Dimensions		
A Wheelbase 2WD / 4WD (mm)	2258 / 2258	2258 / 2258
B Overall length 4WD - includes front weight (mm)	4131	4131
C Overall width (mm)	2087	2087
D Height to top of ROPS (mm)	2589	2589
E Height to top of exhaust (mm)	2482	2482
F Height to top of steering wheel (mm)	1814	1814
G Ground clearance under front axle 2WD / 4WD (mm)	504 / 415	504 / 415

● Standard ○ Optional * Developed by FPT Industrial ** Speed with standard tyres

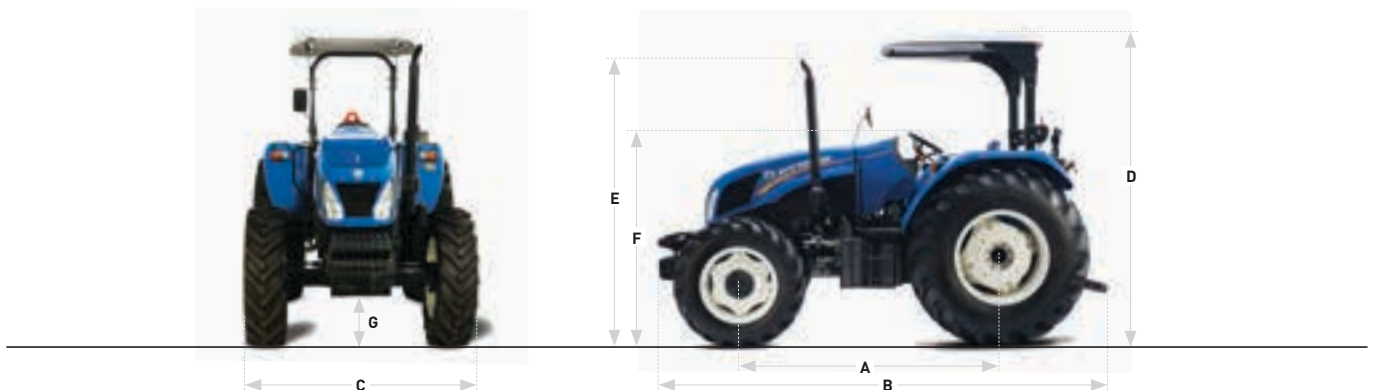

www.newholland.com/za

The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. Bts Adv. - Printed in Italy - 05/18 - (Turin) - RSA8184N/INB